



Silicone Sealant for Plastic Applications

Information on GE SilPruf* SCS2700 Low-Modulus Silicone Sealant

SCS2700 is a versatile, ready-to-use single-component silicone sealant that offers more flexibility than is available in most typical sealants passing with up to +100% movement in extension and -50% movement in compression via the ASTM C719 cyclic fatigue movement ability test. It is useful in a variety of sealing, bonding and weatherproofing applications and especially notable is the low-modulus (softer and more flexible) characteristic of the cured silicone rubber which does not appreciably harden nor soften from -40°C/°F to 120°C/250°F. This soft adhesive is particularly helpful for bonding dissimilar materials with differing coefficients of thermal expansion (CTEs) and moreso for plastic materials which have significantly higher CTEs than many other materials.


Commercialized in 1999, this product is formulated with 100% silicone polymer, is inherently UV resistant and needs no special precautions against freeze/thaw, salt water, natural weathering or direct sunlight and will not crack, split or harden over time. SCS2700 can be applied in temperatures below freezing for winter repair projects and on surfaces up to 35°C/122°F in summer conditions. Instructions for surface preparation, use and installation can be found on the product datasheet; see www.siliconeforbuilding.com

Compatibility

SCS2700 is tested as compatible to polycarbonate and does not lend to stress crazing or cracking of these materials.

Available Colors

SCS2700 is available in 8 standard colors including white, black and 3 shades of grey. For a full list of color options see www.siliconeforbuilding.com and navigate to the SCS2700 landing page or product datasheet.

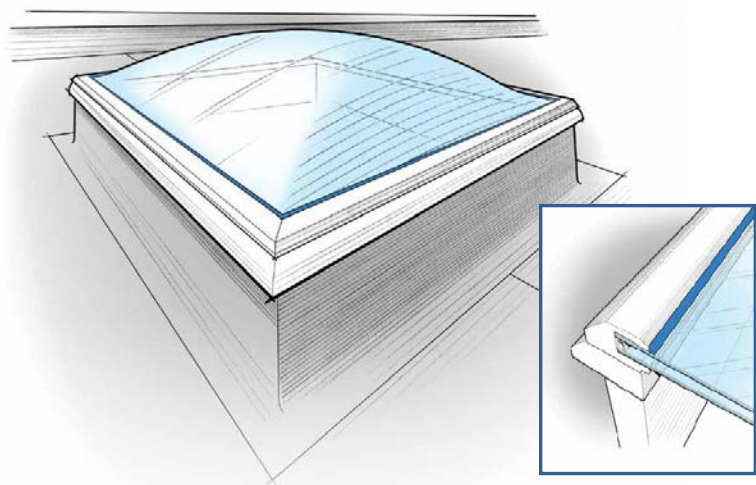



Suitable Substrates

SCS2700 attains primerless bonds to, and is compatible with the following materials:

Material	Also known as	Adhesion	Comments
Acrylonitrile Butadiene Styrene	ABS, CYCOLAC™	primerless	10457
Acrylonitrile Styrene Acrylate	ASA/PC, Geloy*	primerless	07626
Chlorinated Polyvinyl Chloride	CPVC	primerless	06591, 10320
Expanded Polyvinyl Chloride	Sintra	primerless	10320
High-density Polyethylene	HDPE	SS80 primer	10320
Modified Polyphenylene Oxide	PPO, NORYL™	test SS80	
Polybutylene Terephthalate	PBT, VALOX™	primerless	10320
Polyethylene Terephthalate	PETG, PET	primerless	06591
Polycarbonate, plain	Makrolon®, Lexan*	primerless	Compatible, 10272
Polycarbonate, coated for UV resist	Makrolon®, Lexan*	primerless	Compatible, 10272
Polycarbonate, coated for mar-resist	Makrolon®, Lexan*	primerless	Compatible, 10290
Poly(methyl methacrylate) PMMA	acrylic, Plexiglas, Lucite	primerless	06591
Polystyrene	PS	primerless	10320
Polyvinyl chloride	PVC, vinyl (rigid)	primerless	06591, 07099, 10294
Polyetherimide Resins	PEI, ULTEM™	test SS80	
Polyester/Fiberglass composites	Gel Coat	primerless	10320
Vinylester/Fiberglass composites	Gel Coat	primerless	10320
Epoxy/Fiberglass composites	Gel Coat	primerless	10320



THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END- USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end- use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.